


Handheld 1D/ 2D Imager

TD-5208



- **Dimensions**

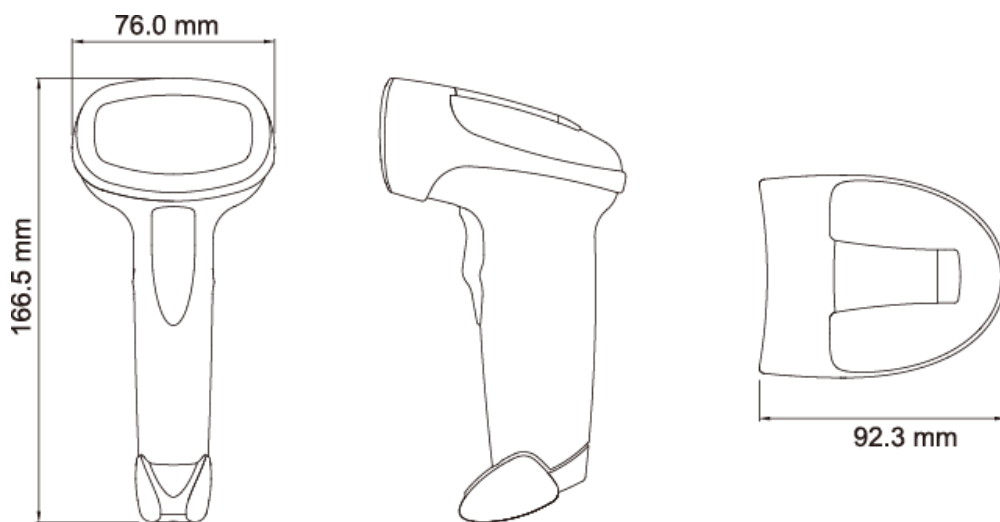

- Specifications**

Model		TD-5208N
General		
Sensor	CMOS Image Sensor	
Resolution	752 x 480	
Light Source	LED (622 nm~628 nm)	
Scan Angle	60° Horizontal, 60° Vertical	
Scan Pattern	Area	
Rotation Sensitivity	360 around the optical Axis	
Minimum Element Width	35 mm (1.38 mil) 1-D	
	45 mm (1.77 mil) 2D, Matrix	
Print Contrast	30% minimum	
Interface	RS-232 or USB selectable	
Indicator	Buzzer and LED illumination	
Area Illumination	4 x LED (630nm ±10%)	
Symbologies		
Readable Bar Code Symbologies (1D)	Code128, EAN-13, EAN-8, Code39, UPC-A, UPC-E, Codabar, Interleaved 2 of 5, ISBN, Code 93, UCC/EAN-128, GS1 Databar, etc.	
Readable Bar Code Symbologies (2D)	PDF417, QR Code (Model 1/2), Data Matrix (ECC200, ECC000, 050, 080, 100, 140), Aztec, Maxicode, etc.	
OCR Font(optional)	OCR-B	
Others		
Material	ABS + polycarbonate, co-molded rubber	
Color	Grey	
Shock Resistance	1m drop onto concrete	
Compliance	---	
Weight	220 g (with cable)	
Dimension (mm)	166.5 (L) x 76 (W) x 92.3 (H)	
Cable Length	1.8 m	
Ambient Light	0~100,000 Lux	
Operating Temperature	0°C~40°C	
Operating Humidity	20%-80% RH, non-condensing	
Storage Temperature	-20°C~70°C	
Storage Humidity	5%-95% RH, non-condensing	

